

Washing machines, tumble dryers and rotary ironers
for professional use

[Product overview](#)



Laundry machines from Miele Professional

Never be satisfied with less!



Entire systems from a single supplier

Miele offers professional laundry equipment tailored to your specific needs. High-performance washing machines, tumble dryers and rotary ironers as well as a selection of matching accessories guarantee perfect laundry care and fast processing in all applications: be it small businesses, hotels and restaurants with their own on-premise laundry or nursing and care homes adhering to the strictest of hygiene requirements. Contract cleaners, fire brigades, equine stables and wet cleaners will find laundry machines from Miele Professional to be the products of choice.

Quality

With Miele's proverbial quality, load capacities of up to 70 pounds and tailored solutions for drying and finishing, laundry machines from Miele Professional are the workhorses in any laundry application. The combination of high-quality materials, immaculate workmanship, proven technology and practical innovations has proved its worth in the rough and tumble of a long work day, time and time again. Additional features such as the patented Miele honeycomb drum ensure both thorough and gentle fabric care.

Efficiency

Profit daily from top-class economic feasibility in the washing, drying and ironing processes. As expected, the new PERFORMANCE PLUS laundry machines underline the sparing use of natural resources; all tumble dryers and ironers operate using highly efficient energy and heating systems. All machines are carefully designed for simple, trouble-free use and excel in terms of their top-class ergonomics.



Miele Professional is a decision in favor of top performance, quality and efficiency. High-quality machines which reliably meet the expectations of the discerning customer, day in and day out, underline the trust placed in Miele: 97% of all clients* would buy from Miele again next time around.

Dependability

As a family-run company, now in its fourth generation, our actions, as always, still stem from a sense of responsibility for our products and processes and towards our employees, business associates and the environment.

- Product development with a clear focus on quality, durability and sustainability
- Innovations 'Made in Germany' which have made their mark on the industry
- Award-winning ergonomics, functionality and product design
- Even lower operating costs over entire product life cycle (Total Cost of Ownership) compared to previous generation



Superb technology for discerning users

Top-notch performance in all lines of business



Professional users are particularly discerning – and have every right to be! They demand first-class performance and short cycle times combined with excellent cost-efficiency and reliability. Laundry machines from Miele Professional combine all these properties and excel throughout the rough and tumble of a long work day, time and time again.

This promise does not only apply in businesses where perfect washing, drying and ironing results have a direct impact on the quality of services, such as in hotels, restaurants and nursing homes. Each application brings its own characteristic challenges with it, e.g. flour residue in bakeries, blood and grease from butchers' shops, grease and lubricants in workshops, cosmetics and ointments in spas, and mops and cleaning cloths in contract cleaning operations.

Laundry machines from Miele Professional rise to meet these challenges with their high-performance technology and innovative special programs to tackle all types of soil. The result: Perfect laundry care and gentle care of fabrics – for discerning users in all applications.



Washing machines: Load capacity / Drum volumes	15 lb 2.1 cu. ft.	20-25 lb 2.8-3.5 cu. ft.	25-45 lb 3.9-6.4 cu. ft.	70 lb 11.3 cu. ft.
Little Giants	•			
Octopus		•		
Performance			•	
Performance Plus			•	
Profitronic M				•
Dryers: Load capacity / Drum volumes	15 lb 4.6 cu. ft.	20-35 lb 6.4-10.6 cu. ft.	35-55 lb 11.5-17.7 cu. ft.	90 lb 28.3 cu. ft.
Little Giants	•			
Octopus		•		
Octopus washer-dryer stack		•		
SlimLine		•		
Profitronic M			•	•
Rotary Ironers: Working width / Roller Diameter	32.5" W 6" Dia.	39" W 8" Dia.	55" W 8" Dia.	65" W 10" Dia.
HM 16-80 D	•			
PM 1210		•		
PM 1214			•	
PM 1217				•





Washing machines

Product overview

Unique innovations further Miele's proverbial level of quality and make it possible to take water and energy consumption, speed, ergonomics and durability to new levels. The new PERFORMANCE and PERFORMANCE PLUS Benchmark washer series meet the highest of expectations when it comes to laundry and textile care.

**Miele
patent**

**Exclusive
to Miele**

Innovative and patented solutions underline Miele Professional's market leadership. With exclusive features and details, Miele Professional repeatedly sets standards in terms of product quality, user convenience, cleaning performance and energy efficiency.

Washing machine highlights

- Optimum laundry care and cleaning thanks to patented honeycomb drum 2.0 with redesigned shower ribs
- Large selection of programs, many geared to specific applications

LITTLE GIANT washing machines

Load capacity 15 lb / Profitronic L Plus



Washing machine	PW 6068
User interface	Profitronic L Plus
Load capacity [lb]	15
Drum volume [cu. ft.]	2.1
Max. spin speed [rpm]	1,400
g-factor/residual moisture [%]*	526 / 50
Cycle time** [mins.]	49
Heating type	Electric
Standard voltage	2 AC 208-240V
Frequency [Hz]	60
Rated load [kW]	4.0-5.2
Fuse rating	2-pole 30 A
Drainage	Pump
Front color / material	Lotus White or Stainless Steel
External dimensions H/W/D [in]	33.5 / 23.7 / 28.6

* Residual moisture after hot final rinse ** Cycle time in Cottons program 140°F, hot water fill

Profitronic L Plus controls

- 4 direct-access pushbuttons with jogshuttle
- Display showing all information in local language
- Thermal and chemo-thermal disinfection programs
- User interfaces to suit individual applications

Highlights

- Exclusive to Miele: Gentle fabric care thanks to patented Miele honeycomb drum
- Safe disinfection: Special disinfection programs ensure reliable hygiene
- Top performance on a small footprint: A washer-dryer stack takes up less than 5.4 ft² of valuable floor space

Optional accessories

- Bases for ergonomic loading and unloading

OCTOPLUS washing machines

Load capacity 20–25 lb / Profitronic L Vario controls

octoplus®



Washing machine / Washer-dryer stack	PW 6080 Vario*	PW 5105 Vario*	PWT 6089 Stacked Washer* (requires PT 7189†)
User interface	Profitronic L Vario	Profitronic L Vario	Profitronic L Vario
Load capacity [lb]	20	25	20
Drum volume [cu. ft.]	2.8	3.5	2.8
Max. spin speed [rpm]	1,300	1,100	1,300
g-factor/residual moisture [%]**	520 / 50	370 / 50	520 / 50
Cycle time*** [mins.]	53	53	53
Heating type	Electric	Electric	Electric
Standard voltage	2 AC 220-240V (convertible to 2 AC 208V)	2 AC 220-240V (convertible to 2 AC 208V)	2 AC 220-240V (convertible to 2 AC 208V)
Frequency [Hz]	60	60	60
Rated load [kW]	4.4-5.2 (4.0)	4.4-5.2 (4.0)	4.4-5.2 (4.0)
Fuse rating	2-pole 30 A	2-pole 30 A	2-pole 30 A
Drainage [Pump DN 22 / Valve DN 70]	Pump or valve	Pump or valve	Pump
Front color / material	Octoblue	Octoblue	Octoblue
External dimensions H/W/D [in]	40.2 / 27.6 / 28.7	40.2 / 27.6 / 32.6	76.0 / 27.6 / 30.1

* Industrial use only ** Residual moisture after hot final rinse *** Cycle time in Cottons program 140°F, hot water fill
† PT 7189 dryer specifications are same as PT 7186 (page 17)

Profitronic L Vario controls

- 4 direct-access pushbuttons with jogshuttle
- Display showing all information in local language
- Thermal and chemo-thermal disinfection programs
- User interfaces to suit individual applications

Highlights

- Exclusive to Miele: Excellent fabric care thanks to patented Miele honeycomb drum
- Safe disinfection: Special disinfection programs ensure reliable hygiene

Optional accessories

- Bases for ergonomic loading and unloading

PWT 6089 Vario stacked washer highlights

- Top performance on a small footprint: A washer-dryer stack takes up less than 6.5 ft² of valuable floor space
- Must be used with PT 7189 dryer

PT 7189 Vario stacked dryer highlights

- Ergonomic operation- Convenient operation of the washer-dryer stack through a central control panel
- Must be used with PWT 6089 washer

NEW PERFORMANCE washing machines

Load capacity 30–45 lb / Profitronic D controls



PERFORMANCE

Washing machine	PW 413*	PW 418*
User interface	Profitronic D	Profitronic D
Load capacity [lb]	30	45
Drum volume [cu. ft.]	4.6	6.4
Max. spin speed [rpm]	1,025	950
g-factor/residual moisture [%]**	360 / 50	360 / 50
Cycle time*** [mins.]	52	52
Heating type	Electric, Non-heated	Electric, Non-heated
Standard voltage	3 AC 220-240V 60 Hz (convertible to 3 AC 200-208V 60 Hz)	3 AC 220-240V 60 Hz (convertible to 3 AC 200-208V 60 Hz)
Rated load [kW]	Electric: 10.2-11.8 (8.8-9.4) Non-heated: 2.3 (2)	Electric: 11.9-13.6 (10.4-11.0) Non-heated: 3 (3)
Fuse rating	Electric: 3-pole 25 A Non-heated: 3-pole 16 A	Electric: 3-pole 40 A Non-heated: 3-pole 16 A
Drainage [NPS 2 3/4", DN 70]	Dump valve	Dump valve
Front color / material	Octoblue	Octoblue
External dimensions H/W/D [in]	53.3 / 31.5 / 39.8	57.2 / 36.4 / 37.4

* Industrial use only ** Residual moisture after hot final rinse *** Cycle time in Cottons program 140°F, hot water fill, 3N AC 400V 50 Hz

Profitronic D controls

- 6 direct-access pushbuttons
- 12 programs
- Display showing all information in local language

Optional accessories

- Dispenser pumps for the automatic dispensing of liquid detergents
- Bases for ergonomic loading and unloading

Highlights

- Simple door closure with OneFingerTouch
- Efficient use of resources thanks to modified design of suds container
- Extremely smooth running, even at high spin speeds, thanks to efficient suspension system
- Exclusive to Miele: Optimum laundry care and cleaning thanks to patented honeycomb drum 2.0 with redesigned shower ribs

NEW PERFORMANCE PLUS washing machines

Load capacity 25–45 lb / Profitronic M controls



PERFORMANCE PLUS

Washing machine	PW 811*	PW 814*	PW 818*
User interface	Profitronic M	Profitronic M	Profitronic M
Load capacity [lb]	25	35	45
Drum volume [cu. ft.]	3.9	5.0	6.4
Max. spin speed [rpm]	1,150	1,075	1,075
g-factor/residual moisture [%]**	460 / 45	460 / 45	460 / 45
Cycle time*** [mins.]	45	45	45
Heating types	Electric	Electric, Steam	Electric, Steam
Standard voltage	3 AC 220-240V 60 Hz (convertible to 3 AC 200-208V 60 Hz)	3 AC 220-240V 60 Hz (convertible to 3 AC 200-208V 60 Hz)	3 AC 220-240V 60 Hz (convertible to 3 AC 200-208V 60 Hz)
Rated load [kW]	Electric: 10.2-11.8 (8.8-9.4)	Electric: 14.8-17.1 (12.5-13.4) Steam: 2.3 (2.3)	Electric: 19.4-22.6 (16.6-17.7) Steam: 3 (3)
Fuse rating	Electric: 3-pole 25 A	Electric: 3-pole 40 A Steam: 3-pole 16 A	Electric: 3-pole 50 A Steam: 3-pole 16 A
Drainage [NPS 2 3/4", DN 70]	Dump valve	Dump valve	Dump valve
Front color / material	Stainless steel	Stainless steel	Stainless steel
External dimensions H/W/D [in]	53.3 / 31.5 / 37.0	57.2 / 36.4 / 33.5	57.2 / 36.4 / 37.4

* Industrial use only ** Residual moisture after hot final rinse *** Cycle time in Cottons program 140°F, hot water fill, 3N AC 400V 50 Hz

Profitronic M controls

- 6 direct-access pushbuttons with jogshuttle
- Freely programmable controls with 199 program slots
- Large range of programs - Application-specific wash programs
- Display showing all information in local language
- Card reader

Highlights

- Simple door closure with OneFingerTouch
- Efficient use of resources thanks to modified design of suds container
- Extremely smooth running, even at high spin speeds, thanks to efficient suspension system
- Optimum laundry care and cleaning thanks to patented honeycomb drum 2.0 with redesigned shower ribs
- Very low residual moisture levels on account of high g-factor
- High daily throughput on account of very short cycles

Optional accessories

- Dispenser pump for the automatic dispensing of liquid detergents
- Bases for ergonomic loading and unloading
- Retrofittable weighing base

PROFITRONIC M washing machines

Load capacity 70 lb / Profitronic M controls



Washing machine	PW 6321*
User interface	Profitronic M
Load capacity [lb]	70
Drum volume [cu. ft.]	11.3
Max. spin speed [rpm]	1,000
g-factor/residual moisture [%]**	460 / 50
Cycle time*** [mins.]	47
Heating types	Electric, Steam
Standard voltage	Electric: 3 AC 220-240V 60 Hz (convertible to 3 AC 208V 60 Hz) Steam: 3 AC 208V 60 Hz (convertible to 3 AC 220-240V 60 Hz)
Rated load [kW]	Electric: 25 (20) Steam: 4.3 (4.3)
Fuse rating	Electric: 3-pole 80 A (3-pole 70 A) Steam: 3-pole 15 A (3-pole 15 A)
Drainage [NPS 2 3/4", DN 70]	Dump valve
Front color / material	Stainless steel
External dimensions H/W/D [in]	64.6 / 42.8 / 50.1

* Industrial use only ** Residual moisture after hot final rinse *** Cycle time in Cottons program 140°F, hot water fill

Profitronic M controls

- 6 direct-access pushbuttons with jogshuttle
- Freely programmable controls with 199 program slots
- Large range of programs - Application-specific wash programs
- Display showing all information in local language
- Card reader

Highlights

- Exclusive to Miele: Gentle laundry care thanks to patented honeycomb drum
- Very low residual moisture levels on account of high g-factor
- High daily throughput on account of very short cycles

Optional accessories

- Dispenser pumps for the automatic dispensing of liquid detergents
- Bases for ergonomic loading and unloading





MIELE
PROFESSIONAL

20

MIELE
PROFESSIONAL

MIELE
PROFESSIONAL



Dryers

Product overview

Dryers from Miele Professional are the perfect extension to high-end laundry care. By drying a wide range of textiles fast, gently and precisely, these machines make a huge contribution to laundry care and excel in terms of cost-efficiency and conservation of resources.

**Miele
patent**

**Exclusive
to Miele**

Innovative and patented solutions underline Miele Professional's market leadership. With exclusive features and details, Miele Professional repeatedly sets standards in terms of product quality, user convenience, performance and energy efficiency.

- Gentle fabric care thanks to patented Miele honeycomb drum
- Spot-on drying results on all textiles thanks to patented PerfectDry system
- Reduced energy consumption and fast drying, in particular for bulky textiles thanks to patented Air Recycling Plus process
- Further heating systems: Hot water technology

LITTLE GIANT dryers

Load capacity 15 lb / Profitronic L Plus controls



Dryers	PT 7135 C	PT 7138*
User interface	Profitronic L Plus	Profitronic L Plus
Drying system	Condenser	Vented
Load capacity [lb]	15	15
Drum volume [cu. ft.]	4.6	4.6
Cycle time** [mins.]	81	36
Heating type	Electric	Electric
Standard voltage	2 AC 230V 60 Hz	2 AC 208V 60 Hz
Rated load [kW]	3.7	4.3
Fuse rating	2-pole 16 A	2-pole 30 A
Vent diameter [in]	N/A	4
Front color / material	Stainless Steel or Lotus White	Stainless Steel or Lotus White
External dimensions H/W/D [in]	33.5 / 23.7 / 28.0	33.5 / 23.7 / 28.0

* Industrial use only ** Cycle time in 'Normal dry' program

Profitronic L Vario controls

- 4 direct-access pushbuttons with jogshuttle
- Display showing all information in local language
- User interfaces to suit individual applications

Optional accessories

- Bases for ergonomic loading and unloading

Highlights

- Exclusive to Miele: Gentle laundry care thanks to patented honeycomb drum
- Exclusive to Miele: Spot-on drying results on all textiles thanks to patented PerfectDry system
- Top performance on a small footprint: A washer-dryer stack takes up less than 5.4 ft² of valuable floor space

OCTOPLUS dryers

Load capacity 20 lb / Profitronic L Vario controls

octoplus®



Dryers	PT 7186*
User interface	Profitronic L Vario
Drying system	Vented
Load capacity [lb]	20
Drum volume [cu. ft.]	6.4
Cycle time** [mins.]	37
Heating types	Electric
Standard voltage	2 AC 208V 60 Hz or 2 AC 240V 60 Hz
Rated load [kW]	4.9 (208V) or 5.7 (240V)
Fuse rating	2-pole 30 A
Vent diameter [in]	4
Front color / material	Octoblue
External dimensions H/W/D [in]	40.2 / 27.6 / 30.1

* Industrial use only ** Cycle time in 'Normal dry' program

Profitronic L Vario controls

- 4 direct-access pushbuttons with jogshuttle
- Display showing all information in local language
- User interfaces to suit individual applications

Optional accessories

- Bases for ergonomic loading and unloading

Highlights

- Exclusive to Miele: Gentle fabric care thanks to patented Miele honeycomb drum
- Exclusive to Miele: Spot-on drying results on all textiles thanks to patented PerfectDry system

SLIMLINE dryer

Load capacity 23-35 lb / Profitronic B Plus controls



Dryers	PT 8303*
User interface	Profitronic B Plus
Drying system	Vented
Load capacity [lb]	23-35
Drum volume [cu. ft.]	10.6
Cycle time** [mins.]	33
Heating type	Electric
Standard voltage	3 AC 220-240V 60 Hz (convertible to 3 AC 208V 60 Hz / 2 AC 208V 60 Hz)
Rated load [kW]	15.4 (11.7 / 8.1)
Fuse rating	3-pole 40 A (3-pole 35 A / 2-pole 40 A)
Air intake/Vent diameter [in]	6 / 6
Front color / material	Octoblu
External dimensions H/W/D [in]	70.9 / 28.0 / 42.9

* Industrial use only ** Cycle time in 'Normal dry' program

Profitronic B Plus controls

- Rotary selector switch
- Sensor controls for 12 programs

Highlights

- The slim design, just 28 inches wide, fits in the smallest of spaces
- Exclusive to Miele: Spot-on drying results on all textiles thanks to patented PerfectDry system



PROFITRONIC M dryers

Load capacity 35-45 lb / Profitronic M controls



Dryers	PT 8337*	PT 8407*
User interface	Profitronic M	Profitronic M
Drying system	Vented	Vented
Load capacity [lb]	35	45
Drum volume [cu. ft.]	11.5	14.1
Cycle time** [mins.]	24	24
Heating types	Electric	Electric, Steam, Hot Water
Standard voltage	Electric: 3 AC 208V (convertible to 3 AC 220-240V)	Electric: 3 AC 208V 60 Hz (convertible to 3 AC 220-240V 60 Hz) Steam: 3 AC 208V 60 Hz (convertible to 3 AC 220-240V 60 Hz) Hot Water: 3 AC 208V 60 Hz
Rated load [kW]	Electric: 15.4 (17.3-20.4)	Electric: 19.7 (21.9-24.5) Steam: 1.3 Hot Water: 1.3
Fuse rating	Electric: 3-pole 65 A	Electric: 3-pole 65 A Steam: 3-pole 10 A Hot Water: 3-pole 10 A
Air intake/Vent diameter [in]	6 / 6	6 / 6
Front color / material	Stainless steel	Stainless steel
External dimensions H/W/D [in]	55.2 / 35.7 / 40.8	55.2 / 35.7 / 45.9

* Industrial use only ** Cycle time in 'Normal dry' program

Profitronic M controls

- 6 direct-access pushbuttons with jogshuttle
- Freely programmable controls with 199 program slots.
- Large range of programs - Application-specific wash programs
- Display showing all information in local language
- Card reader

Highlights

- Exclusive to Miele: Gentle fabric care thanks to patented Miele honeycomb drum
- Exclusive to Miele: Spot-on drying results on all textiles thanks to patented PerfectDry system
- Exclusive to Miele: Low energy consumption and fast drying, in particular of bulky textiles, thanks to patented Air Recycling Plus process

Optional accessories

- Bases for ergonomic loading and unloading


Highlight: Hot water heating

- Use of energy from co-generation plants, district heat or alternative energy sources such as solar or geo-thermal heat, residual process heat or bio-mass.
- Up to 96% energy cost savings compared with conventional Miele vented dryers

Miele honeycomb drum: Patent EP 0 935 687 B1
Miele PerfectDry system: Patent DE 19 719 661 CZ
Miele Air Recycling Plus: Patent EP 1 682 715 B1

PROFITRONIC M dryers

Load capacity 55–90 lb / Profitronic M controls

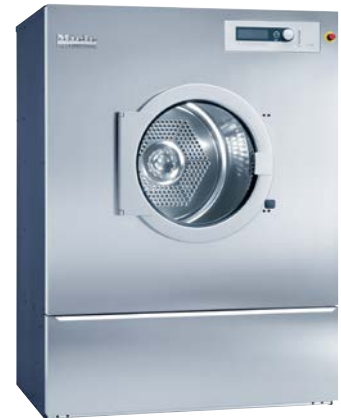

Dryers	PT 8507*	PT 8807*
User interface	Profitronic M	Profitronic M
Drying system	Vented	Vented
Load capacity [lb]	55	90
Drum volume [cu. ft.]	17.7	28.3
Cycle time** [mins.]	24	29
Heating types	Electric, Steam	Electric, Steam, Hot Water
Standard voltage	Electric: 3 AC 220-240V 60 Hz (convertible to 3 AC 208V 60 Hz) Steam: 3 AC 208V 60 Hz (convertible to 3 AC 220-240V 60 Hz)	Electric: 3 AC 208V 60 Hz Steam: 3 AC 208V 60 Hz Hot Water: 3 AC 208V 60 Hz
Rated load [kW]	Electric: 26-30.7 (23) Steam: 1.3	Electric: 27.4 Steam: 1.9 Hot Water: 1.9
Fuse Rating	Electric: 3-pole 80 A Steam: 3-pole 10 A	Electric: 3-pole 90 A Steam: 3-pole 10 A Hot Water: 3-pole 10 A
Air intake/Vent diameter [in]	6 / 6	6 / 6
Front color / material	Stainless steel	Stainless steel
External dimensions H/W/D [in]	64.6 / 47.5 / 40.1	64.6 / 47.5 / 54.5

* Industrial use only ** Cycle time in 'Normal dry' program

Profitronic M controls

- 6 direct-access pushbuttons with jogshuttle
- Freely programmable controls with 199 program slots.
- Large range of programs - Application-specific wash programs
- Program sequence shown in display in local language
- Card reader

Highlights

- Exclusive to Miele: Gentle fabric care thanks to patented Miele honeycomb drum
- Exclusive to Miele: Spot-on drying results on all textiles thanks to patented PerfectDry system
- Exclusive to Miele: Low energy consumption and fast drying, in particular of bulky textiles, thanks to patented Air Recycling Plus process

Optional accessories

- Bases for ergonomic loading and unloading

Highlight: Hot water heating

- Use of energy from co-generation plants, district heat or alternative energy sources such as solar or geo-thermal heat, residual process heat or bio-mass.
- Up to 96% energy cost savings compared with conventional Miele vented dryers





Rotary ironers

Product overview

The feel-good factor generated by well-laundered bed linens, glossy tablecloths and napkins – perfectly finished textiles – is a true reflection of the quality of hotels, restaurants and nursing homes. Clients that put as much faith in the finish of their laundry as they do on cleanliness can rest assured that guests, visitors and residents will feel right at home.

**Miele
patent**

**Exclusive
to Miele**

Innovative and patented solutions underline Miele Professional's market leadership. With exclusive features and details, Miele Professional repeatedly sets standards in terms of product quality, user convenience and laundry finish.

- Freely positionable FlexControl footswitch

HM 16-80 D rotary ironer

Working width 32.5"



Rotary ironers	HM 16-80 D
Roller diameter [in]	6
Working width [in]	32.5
Heater plate material	Aluminum
Ironing speed [ft/min]	6.5-15
Heating type	Electric
Standard voltage	2 AC 208-240V 50-60 Hz
Rated load [kW]	2.9-3.8
Fuse rating	2-pole 20 A
Vent connection Ø [DN]	-
Laundry outfeed	At front
External dimensions H/W/D [in]	38 / 39 / 15

HM 16-80 D highlights

- High-quality roller padding with polyester needle felt and ARAMID needle felt cloth
- Convenient controls with footswitch, adjustable temperature and roller speed
- Simple laundry finish with free roller end
- Steam function for efficient working and a perfect finish
- Fold-away design for simple storage on the smallest of footprints

PM 12 rotary ironers

Working width 39" to 65"



Rotary ironers	PM 1210	PM 1214*	PM 1217*
Roller diameter [in]	8	8	10
Working width [in]	39	55	65
Heater plate material	Aluminum	Aluminum	Aluminum
Ironing speed [ft/min]	5-13	5-13	5-15
Working height [in]	36-39	36-39	40-43
Heating type	Electric	Electric	Electric
Standard voltage	2 AC 240V 50-60 Hz (convertible to 2 AC 220V 50-60 Hz / 2 AC 208V 50-60 Hz)	3 AC 240V 50-60 Hz (convertible to 3 AC 220V 50-60 Hz / 3 AC 208V 50-60 Hz)	3 AC 240V 50-60 Hz (convertible to 3 AC 220V 50-60 Hz / 3 AC 208V 50-60 Hz)
Rated load [kW]	3.7 (3.2 / 2.9)	7.6 (6.5 / 5.9)	12.4 (10.5 / 9.4)
Fuse rating	2-pole 20 A	3-pole 30 A	3-pole 50 A
Vent connection dia. [in]	N/A	2.75	2.75
Laundry outfeed	At front	At front	Front / rear
External dimensions H/W/D [in]	41 / 62 / 19	41 / 78 / 26	44 / 88 / 26

* Industrial use only

Highlights

- Simple and convenient operation using large, touch display
- Individual working height through adjustable machine feet and optional bases
- Uniform pressure over the entire working width guarantees a perfect laundry finish
- High-quality roller padding with ARAMID needle felt cloth
- Exclusive to Miele: Freely positionable FlexControl footswitch
- Patented EasyFold outfeed table cools textiles and provides lasting finish

Optional accessories

- Matching 4" bases



Miele

M. Recker



Support is always available!

Miele Service & Support

Product durability

In line with our philosophy of "Immer besser" we guarantee the highest quality and production standards with our brand "Made in Germany". Miele Professional stands for the reliability of its products like no other manufacturer. Through regular tests that are carried out by our trained customer service technicians you can rest assured that your investment will maintain its value.

Individualized installation

Even during installation Miele is there to support you with a comprehensive range of services. Installation is carefully carried out right from the start, taking into account the local conditions and regulations. Only a well-adjusted machine with parameters set to meet individual requirements and on-site conditions is able to guarantee perfect reprocessing results.

Highest level of operational safety

Miele Customer Service offers regular maintenance checks for your appliances, in order to guarantee you maximum operational safety. This means that potential faults can be identified and dealt with in advance. In addition, it also means that the operational parameters of the machines can be optimized on an ongoing basis.

Maintenance and Services

Regular checks and preventive services increase operational safety and prevent unnecessary repairs. Ensure the regular professional care and maintenance of your machines.

Availability up to 15 years after termination of production

Thanks to their high quality, Miele machines have a long service life. If a repair should be necessary, important functional parts are available for up to 15 years after production.

Miele Professional
9 Independence Way
Princeton, NJ 08540
800-991-9380
www.miele-pro.com

Forever Better

Since 1899, Miele - a family-run company - has subscribed to a clear corporate philosophy condensed into the two words 'Forever better'. This overarching claim is the foundation of Miele's proverbial quality and sustainability and the power of innovation of a brand 'Made in Germany'. A brand promise which gives users the certainty of having chosen the right product.

Award-winning

Uncompromising product reliability and service dependability is the reason why customers have repeatedly voted Miele the best and most trustworthy brand. Coveted awards such as the MX Award, the iF and reddot Design Awards and the German Sustainability Prize confirm the distinguished position Miele enjoys with respect to design, quality management and the sparing use of resources.

Miele Professional develops and manufactures a broad range of high-quality laundry machines, dishwashers, laboratory glassware washers, and dental washer-disinfectors. Carefully selected accessories, comprehensive service and a Miele factory service operation guarantees a fast response and ensures that machines perform to perfection and offer the ultimate in performance and efficiency.